



SELECT DOOR

artistry and attention to detail

Fire Rated Hardwood Doors and Frames



Offered in 20, 45, 60, and 90 minute labels with matching wood veneered rated frames, you may choose from our library of styles and profiles. Or let our design / engineering team develop your own unique design.

Our hardwood fire rated door is your opportunity to meet both code and your customer's design requirements. We use true custom stile, rail, and floating panel construction for plant on panels. Most domestic and imported species may be used in this construction.



2074 Perry Road, North Java, NY 14113

(800) 535 - 9335, Fax (585) 535 - 9923

www.selectcustomdoor.com: door@selectcustomdoor.com



SELECT DOOR
artistry and attention to detail

Compliance - UL10c, CAN 4 S106, UBC 7-2, NFPA 252 standards

Specifications:

1 3/4" or 2 1/4" thickness

Maximum opening: 3'6" x 8'0"


Edge sealing system incorporated in door edge

Minimum member widths: stile & top rail = 5", bottom rail = 8 1/4"

May be used in any "Category C" frame

Construction: coped/tenon or dado/tenon construction

Standard or custom cope profiles,
applied moldings,
and panel raise

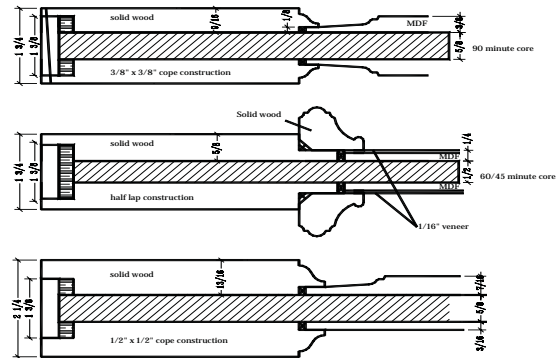


Prehang:

Composite core with wood veneer & edge band

3/4" thick & up to 11" flat jambs

Metal installation brackets included

Machine preparation for hinges and locksets

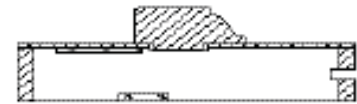

Marking:

Warnock Hershey label

Intertek Testing Service

2074 Perry Road, North Java, NY 14113

(800) 535 - 9335, Fax (585) 535 - 9923

www.selectcustomdoor.com: door@selectcustomdoor.com